

T5 is a mini portable multifunctional GNSS receiver, a new generation of measurement engine, supporting tilt measurement, built-in 4G Modem, radio, Bluetooth and WIFI. It adopts a new appearance design, magnesium alloy structure and Linux operating system. It is an extremely light-weight and portable geodesic GNSS receiver.



## Characteristic

### Linux Intelligent System

Qualcomm Cortex-A7 + Linux, the intelligent system platform, brings efficient computing and unlimited expansion of product functions to users.

### Multi Constellation

With its 1408 channels, T5 provides an excellent on board real time navigation solution with high accuracy. All GNSS signals (GPS, GLONASS, BDS, GALILEO, QZSS, SBAS and IRNSS) are included.

### Tilt Measurement

T5 has the IMU technology. Fast initialization and up to 60° inclination.

### Combined Antenna

The new four in one antenna integrates GNSS, WIFI, Bluetooth and 4G, with smaller volume and better signal.

### 4G Modem


T5 has an internal 4G Modem that operates with more cellular network signals, a fast internet connection is guaranteed.

### Long Endurance

Built in high-capacity lithium battery ensures continuous working time of more than 16 hours under normal operation.

### IP65 Design

Industrial design, solid magnesium alloy shell, in line with IP65 design requirements, safe and reliable.

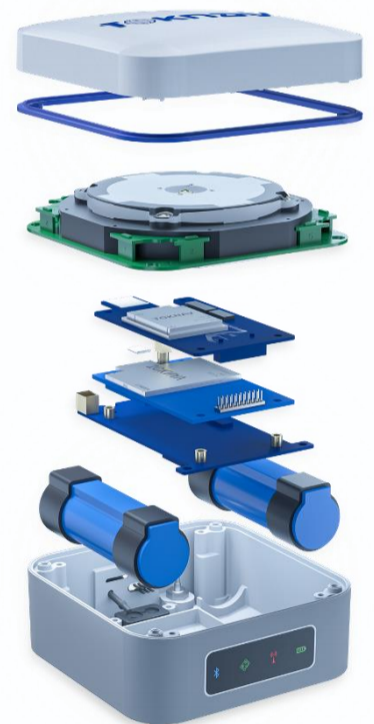

Europe, North & South America  
Tel & WhatsApp: +1 (323) 847-7713 (Ian)  
Asia, Africa & Oceania  
Tel & WhatsApp: +86 139 2607 5986 (Jeffrey)

ITEM		SPECIFICATION	REMARKS
<b>HARDWARE SYSTEM</b>		<b>Qualcomm Cortex-A7</b>	
<b>OS</b>		<b>Linux</b>	
<b>GNSS</b>	GPS	L1C/A, L1C, L2P(Y), L2C, L5	
	GLONASS	L1, L2, L3	
	BDS	B1I, B2I, B3I, B1C, B2a, B2b	
	GALILEO	E1, E5a, E5b, E6	
	QZSS	L1, L2, L5	
	SBAS	L1	
	NavIC (IRNSS)*	L5*	IRNSS support in future
	Channel	1408	
	Data format	NMEA-0183	
	Correction I / O Protocol	RTCM3.X	
	Data update frequency	5Hz (max)	
	Recapture Time	<1s	
	Cold Boot	<40s	
<b>POSITIONING ACCURACY</b>	Single (RMS)	Horizontal: 1.5m    Vertical: 2.5m	
	DGPS (RMS)	Horizontal: 0.4m    Vertical: 0.8m	
	RTK (RMS)	Horizontal: $\pm(8\text{mm}+1\text{ppm})$ Vertical: $\pm(15\text{mm}+1\text{ppm})$	
	Time Accuracy (RMS)	20ns	
	Static Accuracy (RMS)	Horizontal: $\pm(2.5\text{mm}+0.5\text{ppm})$ Vertical: $\pm(5\text{mm}+0.5\text{ppm})$	
	Speed Accuracy (RMS)	0.03m/s	
	Tilt compensation Accuracy (within 60°)	$\leq 2\text{cm}$	
<b>SYSTEM</b>	Bluetooth	BR+EDR+BLE	
	WIFI	802.11 b/g/n	
	Network	LTE FDD: B1/2/3/5/8 LTE TDD: B38/39/40/41 GSM: 900/1800MHz	
	Data Radio	Receive Only Frequency: 410~470MHz Protocol: TRIMTALK, TRIMMK3, SOUTH, TRANSEOT Air baud rate: 9600 / 19200bps	
	Storage	32GB Storage	
<b>INDICATOR</b>	Bluetooth Indicator	Show Bluetooth status	
	Satellite Indicator	Show position status	
	Data link Indicator	Show differential signal status	
	Power Indicator	Show power status	
<b>BATTERY</b>	Battery	3.7V, 9600mAh	
	Work time	More than 16 hours (Typical, Rover, GSM)	The static working mode supports continuous data collection for 24 hours under full power
	Charge	MTK PE+1.1/2.0    9V/2A USB PD 12V/1.25A 5V/3A	Support fast charging adapter and adaptively and dynamically adjust charging current



**Europe, North & South America**  
 Tel & WhatsApp: +1 (323) 847-7713 (Ian)  
**Asia, Africa & Oceania**  
 Tel & WhatsApp: +86 139 2607 5986 (Jeffrey)

<b>ENVIRONMENTAL</b>	Work Temperature	-20℃~+60℃	
	Storage Temperature	-40℃~+85℃	
	Shock	Withstand 1.5M pole drop	
	Protection	IP65	
<b>PHYSICAL</b>	Material	Magnesium alloy main body, ABS/PC top cover	
	Dimension	100.5mm*100.5mm*72mm	
	Weight	≤0.63kg	
<b>A FULL SET</b>	T5 Device	1 SET	
	USB power adapter	1 PCS	
	USB A To Type-C	1 PCS	
	Radio Antenna	1 PCS	

▲ Manufacturers may update parameters at any time, please refer to the latest product information.



**Europe, North & South America**

Tel & WhatsApp: +1 (323) 847-7713 (Ian)

**Asia, Africa & Oceania**

Tel & WhatsApp: +86 139 2607 5986 (Jeffrey)